



Fastrac-800 Radiant Conveyor Toasters

Models: FT-800 208V FT-800-CE 230V FT-800 240V FT-800H 208V FT-800H 240V

PRODUCT:

QUANTITY:

ITEM#:

Designed Smart.

Developed for high output

- The Fastrac 800 model can generate up to 800 slices of Toast per hour. The Fastrac H (3" opening) handles up to 530 thicker slices of bread.
- Toasters have an extended Super Feeder and Warming Area to allow for high volume production.
- Unique Warming area keeps toast at the perfect temperature until you are ready to serve.
- Front-Exiting Hot Air blows directly on toast in feeder area, accelerating the toasting action.

Maximum Versatility

- A variable speed control for the conveyor and controls for top and bottom heating elements produce optimum results in toasting color and texture.
- The Fastrac 800 is able to handle all types of breads, bagels or muffins under 1 1/2" thick. Fastrac 800H handles thicker breads up to 3".

Safest Toaster in the Industry

- Protects your employees with "Cool Touch" exteriors... both sides and top surfaces.
- Right hand control panel is convenient and helps protect against contact with front wire guards.
- Thermostatically controlled fan stays on after toaster is shut off to continue to cool exterior surfaces.

Energy Efficient

- Power-Saver "stand-by" switch for short off-periods helps reduce energy by 75% and allows quick reheating (2 minutes).

Easy to Maintain and Service

- Conveyors and "crumb trays" are easily accessible and simple to clean.
- Removable side panel allows easy access for service.

Built Solid

Built to Last

- Stainless Steel construction protects against kitchen 'wear and tear' and rust.
- Metal sheathed heating elements offer enhanced durability and consumer safety vs. quartz heating tube that can shatter and contaminate food.
- High Temperature insulated wire is used for long life.
- High Temperature bearings never require lubrication.



MODEL FT-800 RADIANT CONVEYOR TOASTER

APW Wyott Design Features

- Individually controlled top and bottom heating element.
- Superfeeder included.
- Removable reflector tray for ease in cleaning.
- High temperature bearings never require lubrication.
- Rotary standby switch conserves energy during slow periods.
- Main power rotary switch is easy to use.
- All stainless steel construction.
- Fully insulated and air-cooled (toaster top and side consistently tested below 130°).
- Thermostatically controlled fan for optimal performance and safety.
- Stainless steel bread tray extends forward from toaster warming area, increasing overall holding capacity.

Options

- Correctional Package – designed to the standards of the American Correctional Institute.

Reliability Backed By APW Wyott's Warranty

- All APW Wyott's Toasters are backed by a 1 year Parts and Labor warranty, including On-Site Service calls within 50 miles of authorized service technicians:
- Certified by the following agencies:



* FT-800 Standard Opening Only

See reverse side for product specifications.



APW Wyott Foodservice Equipment Company

729 Third Avenue • Dallas, TX 75226 • 800-527-2100 • 1-214-421-7366 • Fax 1-214-565-0976

For more information e-mail us at: Info@APWwyott.com


Rev. 1/1/2003

PRODUCT:

QUANTITY:

ITEM#:

Fastrac-800 and Fastrac 800H Radiant Conveyor Toasters

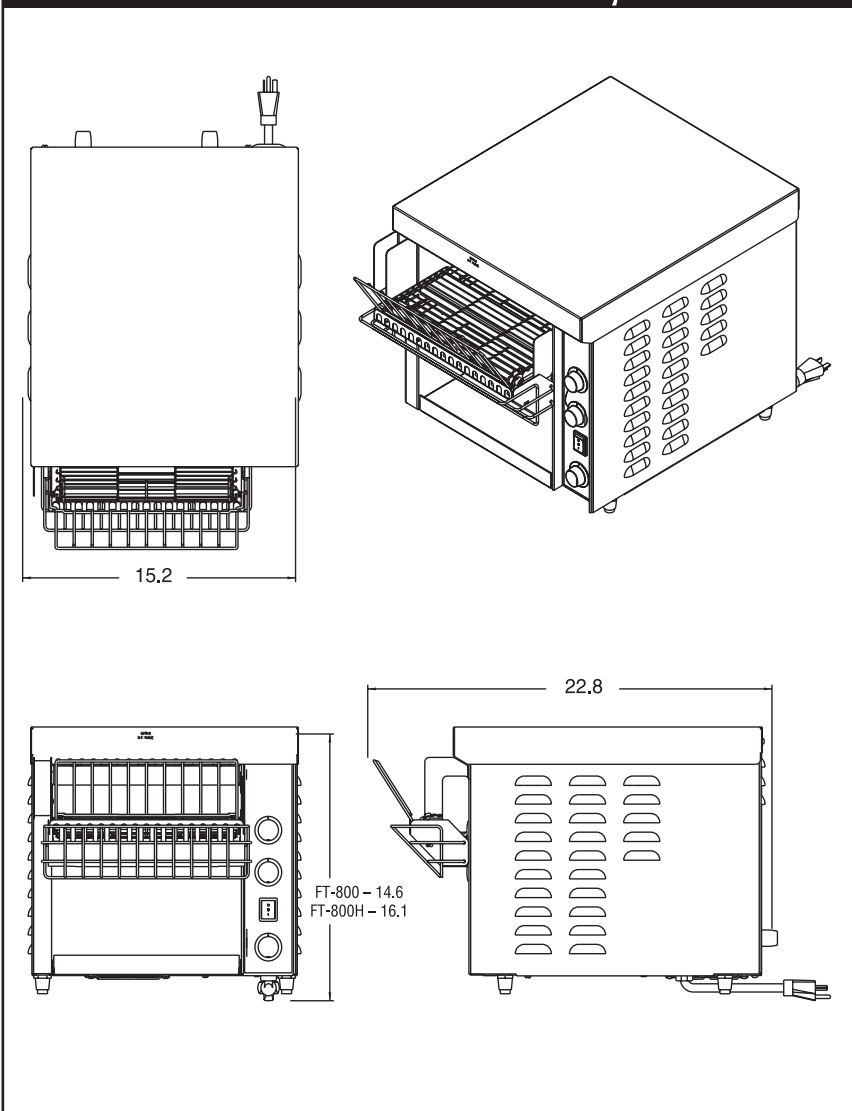

Models FT-800 and FT800H

PRODUCT SPECIFICATIONS

Construction:

Stainless steel housing and radiant reflector. Metal sheathed heating elements. Stainless steel wire conveyor belt. Stainless steel front wire guard. High temperature insulation protects control panel and exteriors.

Electrical Information:

Each unit is equipped with a 40", three wire grounded power cord which terminates with a standard three-pronged male plug. The 208/240 units use a NEMA 6-20P plug. In Canada, cord length is 64".

Electrical Specifications:

- FT-800: 208V, 2850W; 13.7 Amps
- FT-800-CE: 230V, 2850W; 12.4 Amps
- FT-800: 240V, 2850W; 11.9 Amps
- FT-800H: 208V, 2850W; 13.7 Amps
- FT-800H: 240V, 2850W; 11.9 Amps

Capacity:

- FT-800 – up to 800 slices per hour
- FT-800H – up to 528 slices per hour

Overall Dimensions:

- FT-800 - 14.6" H x 15.2" W x 22.8" D
(371mm x 385mm x 579mm)
- FT-800H - 16.1" H x 15.2" W x 22.8" D
(409mm x 385mm x 579mm)

Product Opening Dimension:

- FT-800: 10.5" W x 1.5" H
- FT-800H: 10.5" W x 3" H

Shipping Weight:

- FT-800: 55 lbs (25 kg)
- FT-800H: 55 lbs (25 kg)
- F.O.B. Dallas. TX

World Class Support

World Class Sales Support to assist you with finding the right solution to your operation's needs. Call Customer Service at (800) 527- 2100 or Fax your request to (214) 565-0976. For more information about APW Wyott's World Class Support and High Performance Equipment, look us up on the Internet at www.APWwyott.com

Most Extensive Service System in the Industry! Wyott has three levels of service support for your needs:

- Direct Service Hot Line to Service Department, call (800) 527-2100.
- To find the Registered Service Technician in your area, call Automated Service Hot Line at (800) 733-2203.