



ST-1 "Mini" Conveyor Toaster

***The ST-1 uses less power
and takes less space –
but gives big conveyor
convenience and output!***



Model ST-1 Shown

Performance plus

The ST-1 "Mini" Conveyor Toaster features big conveyor volume in a small space. It toasts breads, buns, bagels, English Muffins, raisin bread and more. Independent controls for top and bottom heat with forced-air cooling to keep exterior cool. Both front and rear delivery available.

Real energy conserver

The Energy-Saver Switch can reduce power consumption by as much as 75%. All models use 15 amp service; 120V models use only 1.7KW and 208/240V models use only 2.4KW maximum.

Built-in Savory quality

The ST-1 comes to you from the people who originated conveyor toasting. It is constructed from durable and easy-to-clean stainless steel. The conveyor system rides on longer lasting stainless steel ball bearings. Heating elements are unbreakable sheathed metal type.

Productivity information

(depending upon voltage and bread dryness)

- **ST-1** – 150-585 slices/hour



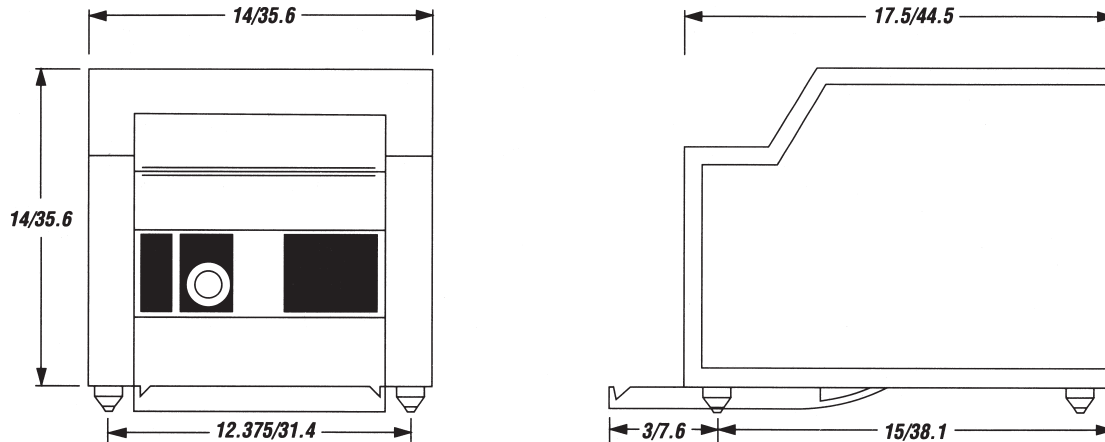
1111 North Hadley Road
P.O. Box 1229
Fort Wayne, IN 46801-1229
Phone: (260) 459-8200 / Fax: (260) 459-8240
Toll Free 800 547-2513



Printed in USA,
Designs and specifications are subject to change without notice
© 2001 Merco Products, Inc., All Rights Reserved

ST-1 "Mini" Conveyor Toaster



Dimensions (inches/cm)



Specifications (Standard models)

PRODUCT #	VOLTAGE/AMPS			KW	NET WT.* lbs/kg	SHIP WT.* lbs/kg	SHIP VOL.* cu ft/cu m
	120V	208V	240V				
14500	14.8	—	—	1.7	35/16	40/18	4.0/0.08
14503	—	12.5	—	2.4	35/16	40/18	4.0/0.08
14501	—	—	10.4	2.4	35/16	40/18	4.0/0.08

*Measurements are approximate

120V	208/240N
	
NEMA 5-15P	NEMA 6-15P
3-foot cord and plug configuration	

Bid Specifications for "Mini" Toasters

"Mini" Toaster shall be a Savory Model ST-1, Product number _____, rated at _____ watts, _____ volts, single phase AC.

Standard equipment shall include

- 22-gauge stainless steel construction
- 2" x 10" product-entry opening
- Metal-encased (sheathed) heating elements
- Conveyor speed control
- Individual upper and lower heat controls
- Energy-saver switch
- 150-585 slice/hour production capacity depending upon voltage and bread dryness
- NEMA 3-foot cordset appropriate to voltage specified

Options & Accessories

Loading ramp

Savory Guarantee

One (1) year warranty from date of purchase on both parts and labor (see price list for details and conditions).

 **Merco Savory**

Enodis

1111 North Hadley Road
P.O. Box 1229
Fort Wayne, IN 46801-1229
Phone: (260) 459-8200 / Fax: (260) 459-8240
Toll Free 800 547-2513